

EZG MULTI TINE GRIP (EZG-LMT)

RECOMMENDED APPLICATIONS

- MANIPULATING, HANDLING OR LOADING
 - IRREGULAR SHAPED OBJECTS
 - DEBRIS
 - ROCKS
 - LOGS
- NOT FOR PRYING OR RIPPING

FEATURES



- CUSTOM DESIGNED TO MATCH BUCKET TIP RADIUS
- RETRACTABLE: SO IT CAN BE LEFT ON MACHINE
- 120° STANDARD ROTATION

QUALITY CONSTRUCTION

- HIGH STRENGTH STEEL USED THROUGHOUT
- HARDENED PINS AND GREASABLE BUSHINGS USED AT PIVOT POINTS

ADDITIONAL OPTIONS

- RIGID OR HYDRAULIC VERSIONS AVAILABLE
- ADDITIONAL TINE OPTIONS

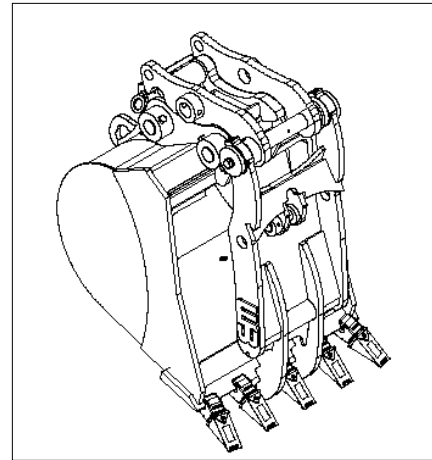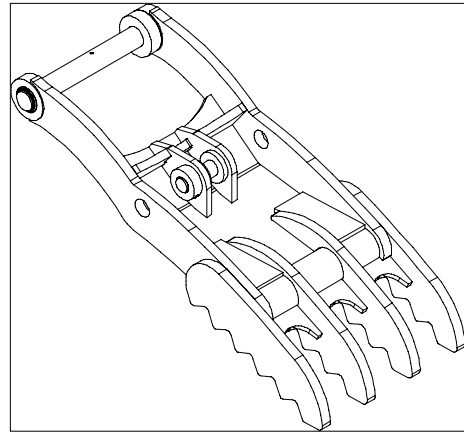

Multi Tine Thumb - Hydraulic and Rigid			
	Part Number	Description	Approx Weight
2,150 – 4,900	EZG-05MN-LMT	2 or 3 Tine	210
2,150 – 4,900	EZG-76MN-LMT	2 or 3 Tine	210
5,000 – 7,000	EZG-1MN-LMT	2 or 3 Tine	210
5,000 – 7,500	EZG-15MN-LMT	2 or 3 Tine	210
7,500 – 11,000	EZG-2MN-LMT	2 or 3 Tine	275
11,000 – 14,000	EZG-3MN-LMT	2 or 3 Tine	320
14,000 – 16,000	EZG-4MN-LMT	2 or 3 Tine	320
16,000 – 25,000	EZG-5MN-LMT	2 or 3 Tine	350

Univ 1 & 2	EZG-UN1-MT	2 or 3 Tine	275
Univ 5	EZG-UN5-LMT	2 or 3 Tine	310

Hydraulic Multi-Tined Thumb			
	Part Number	Description	Approx Weight
12 Metric Ton	EZG-F490-*	2, 3 or 4 Tine	530-840
20 Metric Ton	EZG-F10-*	2, 3 or 4 Tine	1225-1620
25 Metric Ton	EZG-F6-*	2, 3 or 4 Tine	1225-1620
30 Metric Ton	EZG-F8-*	2, 3 or 4 Tine	1225-1620
35 Metric Ton	EZG-F7-*	2, 3 or 4 Tine	1225-1620
40 Metric Ton	EZG-F4-*	2, 3 or 4 Tine	2100-2600
50 Metric Ton	EZG-F5-*	3, 4 or 5 Tine	2100-2600
60 Metric Ton	EZG-F9-*	3, 4 or 5 Tine	2400-3000

WERK-BRAU
Buckets & Attachments

