



MICHELIN[®] X-TWEEL[™] SSL is a non-pneumatic mobility solution, designed for use on all skid steer loaders.






MICHELIN® X-TWEEL[™] SSL

No Maintenance – MICHELIN[®] X-TWEEL[™] SSL is one single unit replacing the current tire/wheel/valve assembly. There is no need for complex wheel/tire mounting equipment. Once they are bolted on, there is no air pressure to maintain.

No Compromise – Productivity can be increased because the MICHELIN X-TWEEL SSL provides greater stability and enables a skid steer to work faster with more comfort for the operator, reducing driver fatigue while improving productivity. The MICHELIN X-TWEEL SSL delivers a consistent footprint with strong wear life that is two to three times that of the pneumatic tire at equal tread depth. Additionally, the unique energy transfer within the poly-resin spokes reduces the "bounce" associated with pneumatic tires.

No Downtime – MICHELIN X-TWEEL SSL performs like a pneumatic tire, but without the risk and costly downtime associated with penetrations and impact damage.

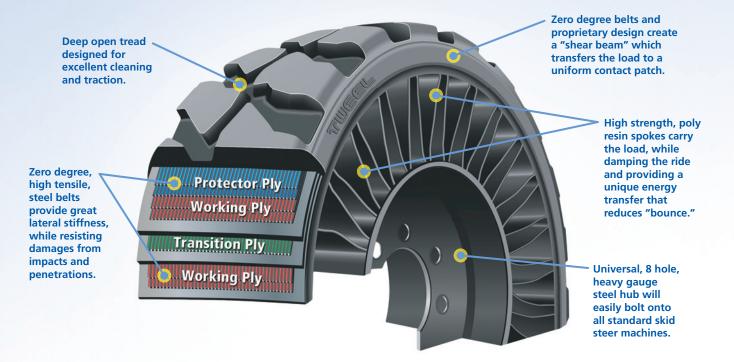

MSPN	Description	Max Load @ 15mph	Section Width	Overall Diameter	Rolling Circumference	Contact Area (in²)	Tread Depth (32nds)
18285	12N16.5	4,400 lbs.	12.1″	32.7″	93.6″	61.4″	30.5

NOTE: Product measurements are subject to change and are listed here for your convenience. Please see your MICHELIN representative for up-to-date data.

USA

Michelin North America, Inc. One Parkway South Greenville, SC 29615 1-888-622-2306

Canada

Michelin North America (Canada), Inc. 2500 Daniel Johnson, Suite 500 Laval, Quebec H7T 2P6 1-888-871-4444

Mexico

Industrias Michelin, S.A. de C.V. Av. 5 de febrero No. 2113-A Fracc. Industrial Benito Juarez 7 6120, Querétaro, Qro. Mexico 011 52 442 296 1600

www.michelintweel.com

Copyright © 2012 Michelin North America, Inc. All rights reserved. The Michelin Man is a registered trademark of Michelin North America, Inc.

